


SOLENOID VALVES | Special Purpose

Plastic

G75-SE | 3 Way External solenoid pilot control 3/4" - 2" NC, NO

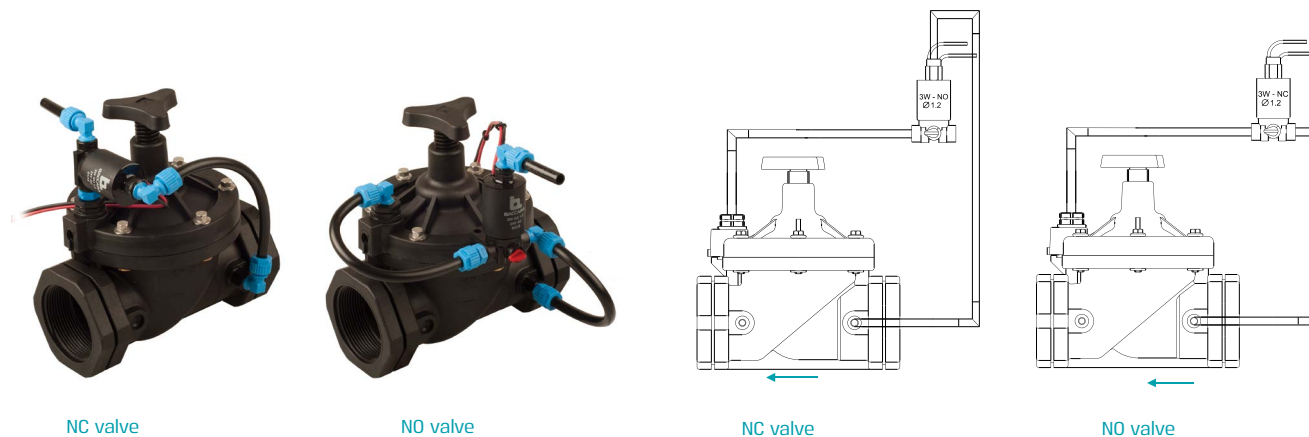

Technical Data

Solenoid	Supplied with 3W 12mm G75 solenoid
Assembly	Supplied with finger filter and accessories

• For technical information, refer to G75-S | Electric 3/4" - 2" 2 Way NC

Coil resistance vs input voltage range

Resistance [Ω]	Suitable input voltage range [V]
4	6 - 9
9	12 - 14
12	14 - 16
23	18 - 21

How to Order

G75-SE	-	PORT	FUNCTION ⁽¹⁾	MANUAL OVERRIDE	FLOW CONTROL	VOLTAGE ⁽⁴⁾	WIRES
		3/4" BSPT 50	2W NC 1	None 0	with 5	24V AC 1	two Null
		3/4" NPT 51	2W NO 2	Plastic 1	without ⁽³⁾ 6	24V AC w/out Diode 1R	three ⁽²⁾ a
		1" BSPT 60				12 V AC 3	
		1" NPT 61				12 V DC 4	
		1-1/2" BSPT 70				24V DC 5	
		1-1/2" NPT 71				23 Ω 6	
		2" BSPT 80				4 Ω B	
		2" NPT 81				9 Ω C	
						12 Ω D	

Example : G75-SE-702151

G75 1-1/2" BSPT, 2W NO, plastic manual override, with flow control, 24V AC, two wires.

G75-SE - 70 2 1 5 1

1) Refers to the valve : 3W NC solenoid = NO valve
3W NO solenoid = NC valve

(2) For Latch only

(3) For 3/4", 1" valves only

(4) For Latch : Refer to coil resistance vs input voltage table

* To order valves manufactured according to your specific requirements, please contact our technical sales department.