


# ELECTRIC & HYDRAULIC VALVES

## G75-SE | 3 Way External solenoid pilot control 3/4" - 2" NC, NO

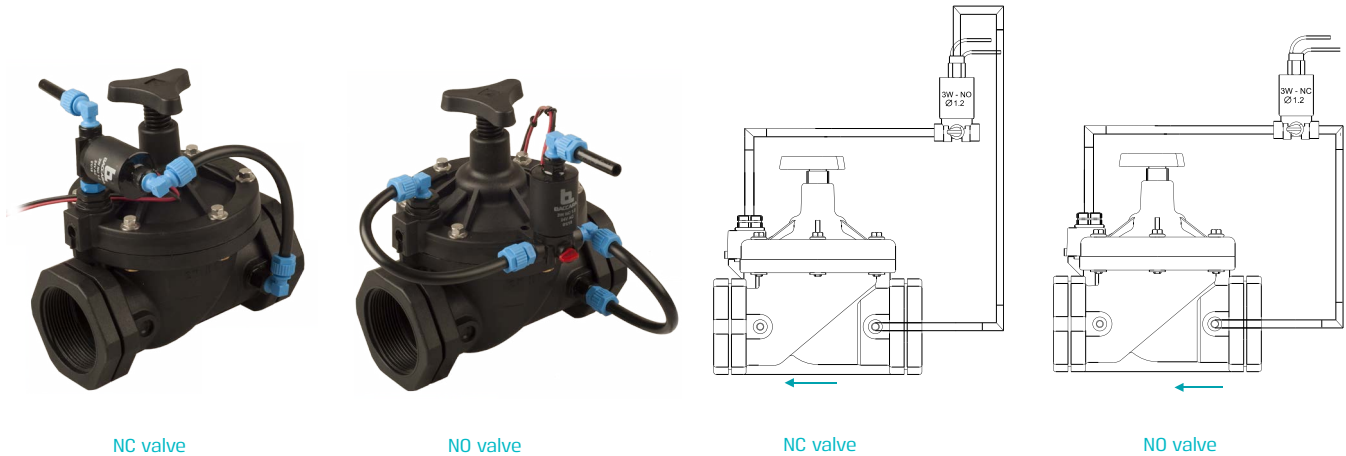

NC valve

NO valve

NC valve

NO valve

### Technical Data

Solenoid	Supplied with 3W 12mm G75 solenoid
Assembly	Supplied with finger filter and accessories

• For technical information, refer to page 52

### How to Order

G75-SE	-	PORT	FUNCTION <sup>(3)</sup>	MANUAL OVERRIDE	FLOW CONTROL	VOLTAGE	WIRES
		3/4" BSP 50	2W NC 1	None 0	with 5	24V AC 1	two null
		3/4" NPT 51	2W NO 2	Plastic 1	without <sup>(1)</sup> 6	24V AC w/out Diode 1R	three <sup>(2)</sup> a
		1" BSP 60		Handle <sup>(2)</sup> 2		12 V AC 3	
		1" NPT 61				12 V DC 4	
		1-1/2" BSP 70				24V DC 5	
		1-1/2" NPT 71				24 Latch (23Ω) 6	
		2" BSP 80				6 Latch (4Ω) B	
		2" NPT 81				12 Latch (9Ω) C	
						16 Latch (12Ω) D	

Example : G75-SE-702151

G75 1-1/2" BSP, 2W NO, plastic manual override, with flow control, 24V AC, two wires.

G75-SE - 70 2 1 5 1

(1) For 3/4", 1" valves only

(2) For Latch only

3) Refers to the valve : 3W NC solenoid = NO valve  
3W NO solenoid = NC valve

\* To order valves manufactured according to your specific requirements, please contact our technical sales department.