




CONTROLLERS & SPECIAL VALVES

ii.ri-C | Smart Irrigation Controller 2 Way

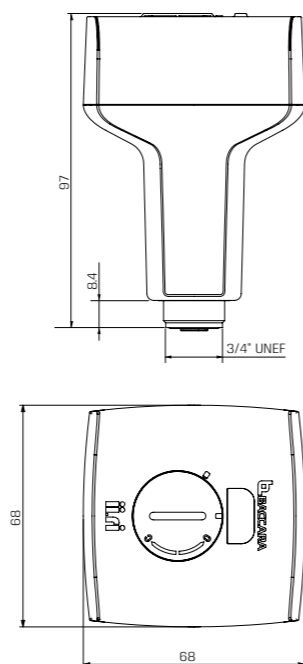

- Single station Irrigation Controller
- Wireless operated by smart device
- Four irrigation program types
- Minimum required iOS 7 or Android V4.3
- Battery included

Technical Data

Function	2 Way Latch
Pressure range	0 to 8 bar
Temperature range	Fluid : 5° to 50°C (no freezing) Ambient : -5° to 50°C
Communication protocol	Wireless BLE
App Downloading	 
Pairing code	Not required
Communication range	Up to 10 m (32.8 feet)
Battery type	CR123
Mounting	Direct mounting on UNEF 3/4"
Standard / Certification	• CE • Federal Communications Commission (FCC)
Standard protection class	• Dust and watertight IP68

ii.ri-C | Smart Irrigation Controller 2 Way

Programming key features

- Four different irrigation plans

Weekly	Interval Days	Even / Odd Days	Window
Irrigation each day of the week	Periodical days up to 98 periods	Even / odd calendar dates	Repeated cycles within a defined time frame
Set up to 6 cycles per day			Set cycle On and Off duration
Option to set different irrigation durations per cycle			Set start and end times for irrigation

How to Order

ii.ri-C	PORT	FLOW CONTROL	COLOR
None	Null	with 5	Off-white SNOW
3/4" BSPT	50	without ⁽¹⁾ 6	Grey CLOUD
3/4" NPT	51		Sky blue SKY
1" BSPT	60		Sea blue SEA
1" NPT	61		Green LEAVES
1-1/2" BSPT	70		
1-1/2" NPT	71		
2" BSPT	80		
2" NPT	81		

Example : ii.ri-C-51-6-CLOUD

ii.ri smart irrigation controller with 3/4" NPT valve, without flow control, color CLOUD



(1) For 3/4" and 1" valves only

* To order controllers manufactured according to your specific requirements, please contact our technical sales department